



Wireless MIDI Interface User's Manual

Model: **WIDI-X8**



Read "Precautions" on page 5 before use



Please read this manual carefully before use.
Please keep this manual for reference.

Special Message Section

This product utilizes batteries or an external power supply (adapter). Do NOT connect this product to any power supply or adapter other than the one described in the manual, on the product, or specifically recommended by CME.

WARNING: Do not place this product in a position where anyone could walk on, trip over, or roll anything over the power or the connecting cords of any kind. The use of an extension cord is not recommended! If you must use an extension cord, make sure that the cord has the ability to handle the maximum current needed by this product. Please consult a local electrician when possible.

This product should be used only with the components supplied or recommended by CME. When used with any components, please observe all safety markings and instructions that accompany the accessory product.

SPECIFICATIONS SUBJECT TO CHANGE:

The information contained in this manual is believed to be correct at the time of printing. However, CME reserves the right to change or modify any of the specifications, without notice or obligation to update existing units.

This product, either alone or in combination with an amplifier and headphones or speaker(s), may be capable of producing sound levels that could cause permanent hearing loss. Do NOT operate for long periods of time at a high volume level or at a level that is uncomfortable. If you experience any hearing loss or ringing in the ears, you should consult an audiologist.

IMPORTANT: The louder the sound, the shorter the time period before damage occurs.

Some CME products may have stands and/or accessory mounting fixtures that are either supplied with the product or as optional accessories. Some of these items are designed to be dealer assembled or installed. Please make sure that stands are stable and any optional fixtures (where applicable) are well secured BEFORE using.

Stands supplied by CME are designed for the respective products only. No other uses are recommended.

NOTICE:

Service charges, incurred due to a lack of knowledge relating to how a function or effect works (when the unit is operating as designed), are not covered by the manufacturer's warranty, and are therefore the owners responsibility. Please study this manual carefully and consult your dealer before requesting service.

ENVIRONMENTAL ISSUES:

CME strives to produce products that are both

user safe and environment friendly. We sincerely believe that our products and the production methods used to produce them, meet these goals. In keeping with both the letter and the spirit of the law, we want you to be aware of the following:

Battery Notice:

This product MAY contain a small non-rechargeable battery which (if applicable) is soldered in place. The average life span of this type of battery is approximately five years. When replacement becomes necessary, contact a qualified service representative to perform the replacement.

This product may also use "household" type batteries. Some of these may be rechargeable. Make sure that the battery being charged is a rechargeable type and that the charger is intended for the battery being charged.

When installing batteries, do not mix batteries with new ones, or with batteries of different types. Batteries MUST be installed correctly. Mismatches of incorrect installation may result in overheating and battery case rupture.

Warning:

Do not attempt to disassemble, or incinerate any battery. Keep all batteries away from children. Dispose the used batteries promptly and as regulated by the laws in your area. Note: Check with any retailer of household type batteries, in your area, for battery disposal information.

Disposal Notice:

Should this product become damaged beyond repair, or for some reason its useful life is considered to be at an end, please observe all local, state, and federal regulations that relate to the disposal of products that contain lead, batteries, plastics, etc. If your dealer is unable to assist you, please contact CME directly.

FCC INFORMATION (U.S.A)

1. **IMPORTANT NOTICE: DO NOT MODIFY THIS UNIT!**

This product, when installed as indicated in the instructions contained in this manual, meets FCC requirements. Modifications not expressly approved by CME may void your authority, granted by the FCC, to use the product.

2. **IMPORTANT:** When connecting this product to accessories and/or another products use only high quality shielded cables. Cable(s) supplied with this product **MUST** be used. Follow all installation instructions. Failure to follow instructions could void your FCC authorization to use this product in the USA.

3. **NOTE:** This product has been tested and found to comply with the limits for a Class B Digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interferences in a residential environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used according to the instructions found in the users manual, may cause interferences, harmful to the operation of other electronic devices. Compliance with FCC regulations does not guarantee that interferences will not occur in all installations. If this product is found to be the source of interferences, which can be determined by turning the unit "OFF" and "ON", please try to eliminate the problems by using one of the following measures:

Relocate either this product or the device that is being affected by the interferences.

Utilize power outlets that are on different branch (circuit breaker or fuse) circuits or install AC line filter(s).

In the case of radio or TV interferences, relocate/reorient the antenna. If the antenna lead-in is 300 ohm ribbon lead, change the lead-in to co-axial type cable.

If these corrective measures do not produce satisfying results, please contact the local retailer, authorized to distribute this type of product. If you cannot locate the appropriate retailer, please contact CME.

The above statements apply **ONLY** to those products distributed in the USA.

PRECAUTIONS

IMPORTANT

Always follow the basic precautions listed below to avoid the possibility of serious injury or even death from electrical shock, damages, fire or other hazards. These precautions include, but are not limited to, the follows:

1. Read and understand all the instructions.
2. Always follow the instructions on the instrument.
3. Before cleaning the instrument, always remove the electric plug from the outlet as well as the USB cable. When cleaning, use a soft and dry cloth. Do not use gasoline, alcohol, acetone, turps or any other organic solutions; do not use liquid cleaner, spray cleaner or too wet cloth.
4. Do not use the instrument near water or moisture, such as bathtub, washbasin, washing pool in the kitchen or similar places.
5. Do not place the instrument in an unstable position where it might accidentally fall over.
6. Do not jam sinks or holes of the instrument; those sinks or holes are used for air circulation to prevent the instrument from overheating. Do not place the instrument near heat sink or any places with poor air circulation.
7. Do not place anything on the power cord. Make sure the power cord is set on a safe place, so nobody will step on it and no body will trip over it.
8. Do not overload the outlet and the AC cable to avoid fire or electrical shock.
9. Do not insert anything in the instrument, which may cause fire or electrical shock. Do not splash any kind of liquid to the instrument.
10. Do not disassemble the instrument in case of accidental electrical shock.
11. Always take the instrument to a qualified service center in need of repair. You will cause yourself in danger if you open or remove the cover, and improper assembly may cause electrical shock in the future use.
12. Unplug all the connectors and take the instrument to a qualified service center if anything in the below listed happens:
 - (1) The power cord or connector get hurt or worn out.
 - (2) Any liquid get in the instrument.
 - (3) The instrument gets rain or water splash.
 - (4) The instrument dose not work properly after following all the instructions regarding to the trouble shootings.
 - (5) The instrument falls down or gets broken.
 - (6) The instrument functions poorly.
13. Do not use the instrument when thundering; otherwise the thundering may cause long-distance electrical shock.
14. Do not use the instrument when there is a gas leak nearby.
15. Switch off your WIDI-X8 when inside or near aircraft. The use of RF product in aircraft is illegal. It may be dangerous to the operation of the aircraft
16. Do not use your WIDI-X8 on the ground without the permission of the ground crew in the airport.

17. Observe 'Turn off the RF communication device such as Mobile Phone' signs, such as those near stores of fuel, chemicals or explosives
18. The operation of some medical electronic devices, such as hearing aids and pacemakers, may be affected if a WIDI-X8 is used next to them. Observe any warning signs and manufacturer's recommendations.
19. Please do not use your WIDI-X8 near any precision instrument, which may cause noise or abnormal operation to the instrument.
20. Switch off your WIDI-X8 at a refueling point, such as a petrol station, even if you are not refueling your own car.
21. Do not store or carry flammable or explosive materials in the same compartment where a radio transmitter, such as a WIDI-X8, is placed.
22. Electronic vehicle systems, such as anti-lock brakes, speed control and fuel injection systems are not normally affected by radio transmissions. The manufacturer of such equipment can advise if it is adequately shielded from radio transmissions. If you suspect vehicle problems caused by radio transmissions, consult your dealer and do not switch on your WIDI-X8 until it has been checked by qualified approved installers.

Efficient Use

For optimum performance with minimum power consumption, note the following:

- ◆ Your WIDI-X8 has the internal antenna. Do not cover part of the internal antenna of the WIDI-X8 with your hands. This affects communication quality, may cause the WIDI-X8 to operate at a higher power level than needed and may shorten communication and standby times.

Radio Frequency Energy

- ◆ Your WIDI-X8 is a low-power radio transmitter and receiver. When it is turned on, it intermittently receives and transmits radio frequency (RF) energy (radio waves). The system that handles the communication controls the power level at which the WIDI-X8 transmits.

Exposure to Radio Frequency Energy

- ◆ Your WIDI-X8 is designed not to exceed the limits for exposure to RF energy set by national authorities and international health agencies. * These limits are part of comprehensive guidelines and establish permitted levels of radio wave exposure for the general population. The guidelines were developed by independent scientific organizations such as ICNIRP (International Commission on Non-Ionizing Radiation Protection) through periodic and thorough evaluation of scientific studies. The limits include a substantial safety margin designed to assure the safety of all persons, regardless of age and health, and to account for any variations in measurements.*Examples of radio frequency exposure guidelines and standards that your WIDI-X8 is designed to conform to:
 - ICNIRP, "Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 G Hz)-International Commission on Non-Ionizing Radiation Protection (ICNIRP)". Health Physics, vol. 74. pp, 494-522, April 1998.
 - 99/519/EC Council Recommendation on the limitation of exposure to the

general public to electromagnetic fields 0 Hz-300 GHz, Official Journal of the European Communities, July 12, 1999.

- ANSI/IEEE C95.1-1992. "Safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300 GHz". The Institute of Electrical and Electronics Engineers Inc., New York, 1991.
- FCC Report and Order, ET Docket 93-62, FCC 96-326, Federal Communications Commission (FCC), August 1996.
- Radio communications (Electromagnetic Radiation Human Exposure) Standard 2003, MediaAuthority.

Keep this manual in safe place

CAUTION:

Setting up

Do not connect the instrument when thundering.

Do not set up the cord or outlet to a moist place, except for that the outlet is specially designed for moist places.

When the power cord is connected to the AC outlet, do not touch the naked part of the cord or the connector.

Always follow the instructions carefully when setting up the instrument.

WARNING:

- Do not expose the instrument to rain or moisture, to avoid fire or electrical shock.

Other precautions:

- Keep the instrument away from electrical interface sources, such as fluorescent light and electrical motors.
- Keep the instrument away from dust, heat and vibration.
- Do not expose the instrument to sunlight.
- Do not place heavy objects on the instrument; do not place containers with liquid on the instrument.
- Do not touch the connectors with wet hands
- Central Music Co. is not responsible for any damage or data loss caused by improper operation to the instrument.
- All the pictures and the LED display in the manual are used for demonstration; they may be different from the real instrument.

This page was intentionally left blank.

Content

1	Features	10
2	System requirement.....	11
3	Operation	11
	3.1 Power supply	12
	3.2 Channel selecting	12
	3.3 Connection and routing	15
	3.4 Removal of the product	16
4	Automation	16
	4.1 Automatic communication establishing	16
	4.2 Automatic notes off	17
	4.3 On-line detection	17
5	Notes	17
6	Appendix.....	18

1 Features




- Professional WIDI products with all the function.
- The working band is 2.4GHz ISM.
- Bi-directional MIDI data transfer.
- 64 radio channels for MIDI data transfer, with manual or automatic radio channel setting mode.
- Manual switching for one-to-multi communication (auto finding and selecting).
- MIDI ports and USB port for various data route including USB⇔RF, MIDI ⇔RF and USB⇔MIDI.
- USB class compliant for Win ME/XP and Mac OS X, supporting hot plug.
- When connected to computer via USB, this product will be automatically recognized as the “USB Audio Device”, fully support MIDI data stream, compatible with Cakewalk, Sonar, Cubase etc.
- Three ways of power supply including 2 x AA size battery, USB power, or DC in power.
- Indicator for both signal and power.
- Low power consumption, high speed, powerful error correction with automatic notes-off and on-line detection.
- Continuous working for more than 20 hours with the battery power supply.
- Maximum wireless transfer distance is 80m (262 feet) without obstacle.
 - **RF means wireless transfer (Radio frequency).**
 - **Specifications and appearance are subject to change without notice.**

2 System requirement

- MIDI device with MIDI ports
- GM compatible sound card or other tone generator
- Computer with 366MHz or faster with available MIDI ports or USB port
- Win ME/XP or Mac OS X
- Cakewalk or other music software
- The less obstacles, the better performance
- Avoid using blue teeth or other RF device to minimize interference

3 Operation

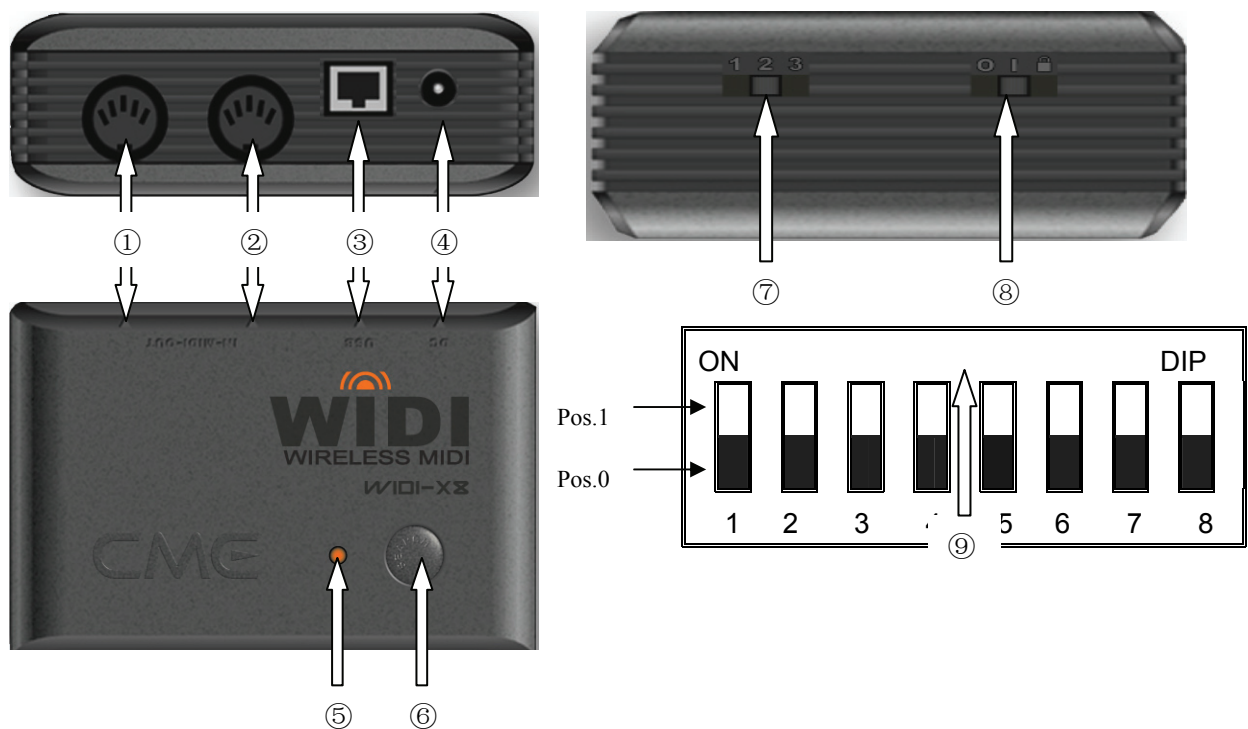

Parts name:

① MIDI OUT

Using the MIDI OUT port to send the MIDI data to other MIDI device such as tone generator.

② MIDI IN

Using the MIDI IN port to receive the MIDI data from other MIDI device such as MIDI keyboard.

③ USB

Using the USB port to connect a computer. (supporting USB bus power)

④ DC

5V DC IN, center positive.

⑤ Indicator

The indicator has two colors, red for power indicator and green for signal indicator.

⑥ Frequency set button


Press the button shortly for one-to-multi function (finding and switching).

Press and hold the button for about three seconds for automatic radio channel setting in the automatic frequency-setting mode, or for returning to the original frequency in the manual frequency-setting mode.

⑦ Route mode selector

The route mode can be set to 1/2/3.

⑧ Power switch

“O” for power OFF, “I” for power ON, “” for “LOCK”. When the switch is set to “LOCK”, the frequency adjust button is disabled.

⑨ Frequency setting mode selector and radio channel selector (DIPs)

DIP 1 is reserved, please do not change its position; DIP 2 is the frequency setting mode selector, position “1” for automatic frequency setting mode and position “0” for manual frequency setting mode. DIP 3-8 are used to select radio channel, please see appendix for detail.

3.1 Power supply

You can use any one of the three ways for WIDI-X8 power supply, 2 x AA size battery, USB bus power, or DC IN.

◆ 2 x AA size battery

Set the power switch to ON, when the power supply is OK, the red indicator is on. If the battery will run out of power, the red indicator will blink.

◆ USB bus power

After starting your computer, connect the WIDI-X8 to the computer via USB cable, then switch on the WIDI-X8 and the power indicator is on.

If it is the first time the WIDI-X8 is connected to the computer, the OS will automatically install the device driver. Follow the instructions for driver installation. When asked for the device driver, please let the OS automatically search the driver. When the installation is completed, the WIDI-X8 will show in the system device list as the “USB Audio Device”.

◆ DC IN

Connect 5V DC (center positive) to the DC IN port, then switch on the WIDI-X8 and the power indicator is on.

3.2 Radio channel setting


The WIDI system supports 64 radio channels for MIDI data transfer. Suppose each

pair of the WIDI-X8 use one channel, up to 32 pairs of WIDI-X8 can work at the same time.

The default system radio channel is already set. If necessary, you can set the radio channel again (you need to remove the battery cover).

You can set the frequency automatically or manually, plus, you can also use the one-to-multi function (automatically finding and switching).

Terms: the selectors set to ON is defined as position “1”, and another position is defined as position “0”, see below:

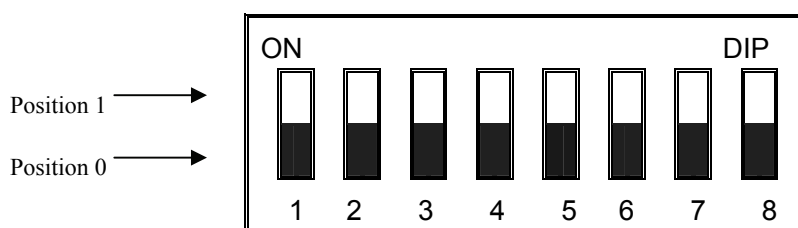

◆ Manually setting the radio frequency

Set the DIP 2 to position 0 for manual frequency setting mode, then use DIP3-8 to set the frequency, refer to the appendix for the specific radio channel.

Important:

To make the WIDI system work properly, make sure each pair of the WIDI-X8s are using the same radio channel, and different pairs must not use the same radio channel.

The WIDI system supports up to 32 pairs of WIDI-X8 used at the same place. If you use many pairs of WIDI-X8s at the same place, please set the radio channels within 1-32, that is, DIP3 is always set to position “0”.

◆ Automatically setting the radio frequency

Set the DIP 2 to position 1 for automatic frequency setting mode. In this mode, DIP 3-8 are disabled. When you switch on the WIDI-X8, it will automatically find a free radio channel and establish communication, and the green indicator will on to show the communication is established.

To change the radio channel, please press and hold the frequency set button of any WIDI-X8 of the pair for about 3 seconds, the it will search a free radio channel again. When it find a available channel, it will told another WIDI-X8 to set to the same radio channel, and both signal indicators are on. If you cannot make the two signal indicators on, please repeat the above steps until the two signal indicators are on.

To disable the frequency set button, please set the power switch to “LOCK”.

Important:

To properly use the automatic frequency setting function, please switch on the two WIDI-X8s in the same pairs one by one. If you cannot achieve the communication, please restart any one of the two WIDI-X8s, or use the finding and switching function to establish the communication.

To use the automatic frequency setting function, make sure both the two WIDI-X8s in the pair are in the automatic frequency setting mode.

◆ **One-to-multi communication (auto finding and switching)**

The one-to-multi function is also regards as the auto finding and switching function. When you have two WIDI-X8s in different radio channels, you can use this function to find another one and establish communication conveniently.

(1) Using the one-to-multi function in the manual frequency setting mode

Set all the WIDI-X8s to the manual frequency setting mode, and regards one WIDI-X8 as the master, and the other ones as the slaves, and all the slaves using different radio channels. Press the frequency set button in the master unit, and the master unit will search for a free slave unit and establish communication with it. Repeat the operation to switch among all the slave units for one-to-multi communication. To return to the original frequency in the master unit, press and hold the frequency set button in the master unit for about 3 seconds.

(2) Using the one-to-multi function in the automatic frequency setting mode

Set all the WIDI-X8s to the automatic frequency setting mode, and regards one WIDI-X8 as the master, and the other ones as the slaves. Press the frequency set button in the master unit, and the master unit will search for a free slave unit and establish communication with it. Repeat the operation to switch among all the slave units for one-to-multi communication. If you press and hold the frequency set button in the master unit for about 3 seconds, it will work as the automatic frequency setting function..

To disable the one-to-multi function, set the power switch to "LOCK".

Important:

In this section, "free" means the WIDI-X8 has not established any communication with any other WIDI-X8.

Even several WIDI-X8s are in different frequency setting mode, you can still use the one-to-multi(auto finding and switching) function.

The WIDI system supports up to 32 pairs of WIDI-X8 used at the same place. If you use many pairs of WIDI-X8s at the same place, please set the radio channels within 1-32, that is, DIP3 is always set to position "0".


3.3 Connection and routing

The WIDI-X8 can send or receive MIDI data via the MIDI IN, MIDI OUT or USB port; plus the RF(radio frequency) , so you can route the MIDI data among MIDI ports, USB and RF to meet your need.

There are three major route modes, those are MIDI ⇔ RF, USB ⇔ RF and USB ⇔ MIDI, controlled by the route selector.

Note: In the below fig, a) and b) means the data route. To make things clear, the 注: WIDI-X8 1 is fixed to route mode 1.


◆ ① Route mode 1

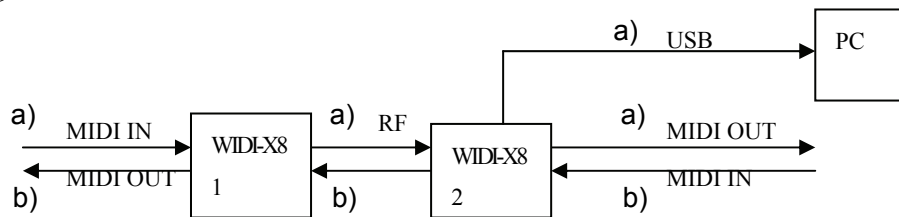

Explanation:

Both the WIDI-X8 1 and 2 are set to route mode 1, that is MIDI ⇔ RF, the most popular mode. In this mode, you can use the WIDI-X8 as the MIDI interface to connect other MIDI device. In this mode, if you use the USB port to connect your computer, please select “USB Audio Device” in your music software as the MIDI device.


◆ ② Route mode 2

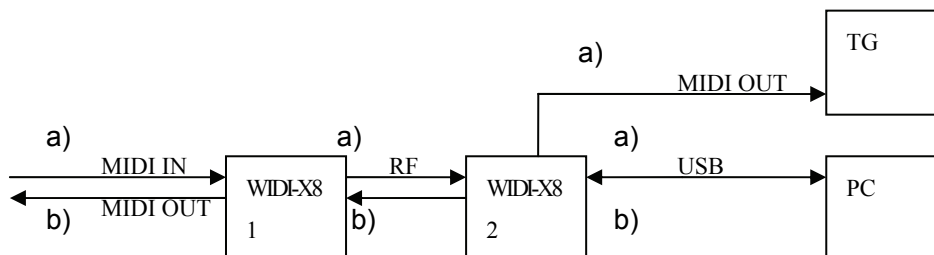

Explanation:

The WIDI-X8 1 is set to route mode 1(MIDI ⇔ RF), and the WIDI-X8 2 is set to route mode 2 (USB ⇔ RF). In this mode, the WIDI system is working as the MIDI interface to your computer. The WIDI-X8 2 is connected to the computer via USB, and the MIDI data is transferred between the two WIDI-x8s via RF. In your computer, please select both MIDI IN and MIDI OUT device to the “USB Audio Device”.

◆ ③ Route mode 3

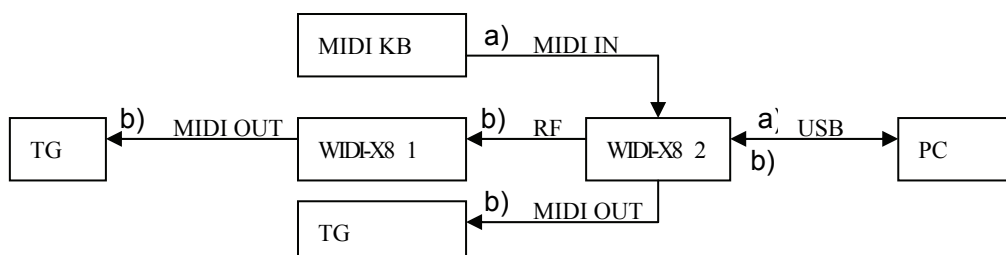

Explanation:

The WIDI-X8 1 is set to route mode 1(MIDI ⇔ RF), and the WIDI-X8 2 is set to route mode 3(USB ⇔ MIDI). In this way, the WIDI-X8 2 works as a USB-MIDI interface. For the route a), please set the MIDI IN device to “USB Audio Device”, and the computer receives the MIDI data from MIDI IN. For the route b), please set the MIDI OUT device to “USB Audio Device”, and the computer sends the MIDI data to MIDI OUT of the WIDI-X8 2. The MIDI OUT data from WIDI X8 2 will also be send via RF to WIDI-X8 1.

3.4 Removal of the product

Please follow the below steps to remove the WIDI-X8 from your system after using it:

(1) For the MIDI connection, you can directly unplug the MIDI cable from the WIDI-X8.

(2) For the USB connection, please follow the below steps:

- Close your music software that accesses WIDI-X8.
- Find “USB Audio Device” in the Windows Device Manager, stop or uninstall it.
- Now you can unplug the USB cable from the WIDI-X8.

4 Automation

4.1 Automatic communication establishing

- Automatic communication establishing when switched on

When the frequency setting mode is set to automatic, the WIDI-X8 will automatically search for available radio channel and establish communication after switched on.

When the frequency setting mode is set to manual, the WIDI-X8 will automatically establish communication. The green indicator will be on to show a successful communication establishing.

- Automatic communication establishing after radio channel changed

Either in the automatic or manual frequency setting mode, when the radio channel is changed, the WIDI-X8 will automatically establish communication. The green indicator will be on to show a successful communication establishing.

- Automatic communication establishing for the one-to-multi function

When you use the one-to-multi function to find and switch to devices or return to the

original channel, the WIDI-X8 will automatically establish communication. The green indicator will be on to show a successful communication establishing.

- Automatic communication establishing during frequency setting mode changes

When the frequency setting mode changes from automatic to manual, the WIDI-X8 will automatically establish communication; when the frequency setting mode changes from manual to automatic, the WIDI-X8 will automatically search for available radio channel and establish communication. The green indicator will be on to show a successful communication establishing.

4.2 Automatic notes off

In either one of the following cases, the system will automatically send the “All Notes Off” MIDI message to stop the sound from the tone generator.

- Bad signal with data loss.
- During the communication the sender is switched off.
- Radio channel changed
- The frequency setting mode changed.
- When using the one-to-multi function to switch the communication.

4.3 On-line detection

After switched ON the WIDI system will automatically detect the on-line status. The green indicator will show the communication status.

5 Notes

- To use the WIDI-X8 with your computer via the USB connection, please make sure the WIDI-X8 is properly connected to the computer and switched on before you launch your music software.
- Close your music software before you stop or uninstall the WIDI-X8 from the USB connection.
- It is recommended that you stop or uninstall the USB device before you unplug the USB

cable.

- In the manual frequency setting mode, please make sure each pair of the WIDI-X8 use the same radio channel, and different pairs use different radio channel for proper data communication.
- Reduce the obstacle and interference as much as possible.
- If the signal indicator blinks, it means there is interference. If the signal indicator blinks fast or off, it means strong interference and the communicator stops. The signal indicators on both WIDI-X8s are on, which means proper communication.
- The WIDI system supports up to 32 pairs of WIDI-X8 used at the same place. If you use many pairs of WIDI-X8s at the same place, please set the radio channels within 1-32, that is, DIP3 is always set to position "0".
- When the battery is going to run out of power (The red indicator blinks), please replace the battery or change to other power supply. If the device will not be used for a long time, please remove the battery.
- When use the DC IN, please notice the voltage is 5V, center positive.
- By the factory set, the frequency setting mode is manual, radio channel 1, route mode 1, power switch OFF.
- **Please do NOT press the frequency set button when switching the WIDI-X8 on.**

6 Appendix

Radio channel selection table

DIP. Freq	3	4	5	6	7	8
1	0	0	0	0	0	0
2	0	0	0	0	0	1
3	0	0	0	0	1	0
4	0	0	0	0	1	1
5	0	0	0	1	0	0
6	0	0	0	1	0	1
7	0	0	0	1	1	0
8	0	0	0	1	1	1
9	0	0	1	0	0	0
10	0	0	1	0	0	1

11	0	0	1	0	1	0
12	0	0	1	0	1	1
13	0	0	1	1	0	0
14	0	0	1	1	0	1
15	0	0	1	1	1	0
16	0	0	1	1	1	1
17	0	1	0	0	0	0
18	0	1	0	0	0	1
19	0	1	0	0	1	0
20	0	1	0	0	1	1
21	0	1	0	1	0	0
22	0	1	0	1	0	1

23	0	1	0	1	1	0
24	0	1	0	1	1	1
25	0	1	1	0	0	0
26	0	1	1	0	0	1
27	0	1	1	0	1	0
28	0	1	1	0	1	1
29	0	1	1	1	0	0
30	0	1	1	1	0	1
31	0	1	1	1	1	0
32	0	1	1	1	1	1
33	1	0	0	0	0	0
34	1	0	0	0	0	1
35	1	0	0	0	1	0
36	1	0	0	0	1	1
37	1	0	0	1	0	0
38	1	0	0	1	0	1
39	1	0	0	1	1	0
40	1	0	0	1	1	1
41	1	0	1	0	0	0
42	1	0	1	0	0	1
43	1	0	1	0	1	0

44	1	0	1	0	1	1
45	1	0	1	1	0	0
46	1	0	1	1	0	1
47	1	0	1	1	1	0
48	1	0	1	1	1	1
49	1	1	0	0	0	0
50	1	1	0	0	0	1
51	1	1	0	0	1	0
52	1	1	0	0	1	1
53	1	1	0	1	0	0
54	1	1	0	1	0	1
55	1	1	0	1	1	0
56	1	1	0	1	1	1
57	1	1	1	0	0	0
58	1	1	1	0	0	1
59	1	1	1	0	1	0
60	1	1	1	0	1	1
61	1	1	1	1	0	0
62	1	1	1	1	0	1
63	1	1	1	1	1	0
64	1	1	1	1	1	1



2006-Sep

Central Music Co.

Tel: +86-10-8580 1115

Fax: +86-10-8580 1114

Web: www.cme-pro.com

E-mail for support: support@cme-pro.com